

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 844 792 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
09.06.1999 Bulletin 1999/23

(51) Int. Cl.⁶: H04N 7/50, H04N 7/60,
H04N 7/66, H04N 7/54,
H04N 7/64

(43) Date of publication A2:
27.05.1998 Bulletin 1998/22

(21) Application number: 98102501.8

(22) Date of filing: 20.05.1993

(84) Designated Contracting States:
DE ES FR GB IT PT

(30) Priority: 19.06.1992 US 901045

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
93911321.3 / 0 646 306

(71) Applicant:
GENERAL ELECTRIC COMPANY
Schenectady, NY 12345 (US)

(72) Inventors:

- Siracusa, Robert Justin
92648 Boulogne Cedex (FR)
- Zdepski, Joel Walter
92648 Boulogne Cedex (FR)

(74) Representative:

Ruellan-Lemonnier, Brigitte
THOMSON multimedia,
46 quai A. Le Gallo
92648 Boulogne Cédex (FR)

(54) **Method for arranging compressed video data for transmission over a noisy communication channel**

(57) A digital compressed video signal transmission system includes a transport processor (FIG. 7) for segmenting (105,115) compressed data into transport cells for transmission. Particular portions of the compressed data are formatted (110,120,125) into further transport cells, which further transport cells are interspersed with

normally occurring transport cells. The further transport cells include redundant video signal data which may be utilized to resynchronize a compressed video signal decoder after loss or corruption of transmitted data.

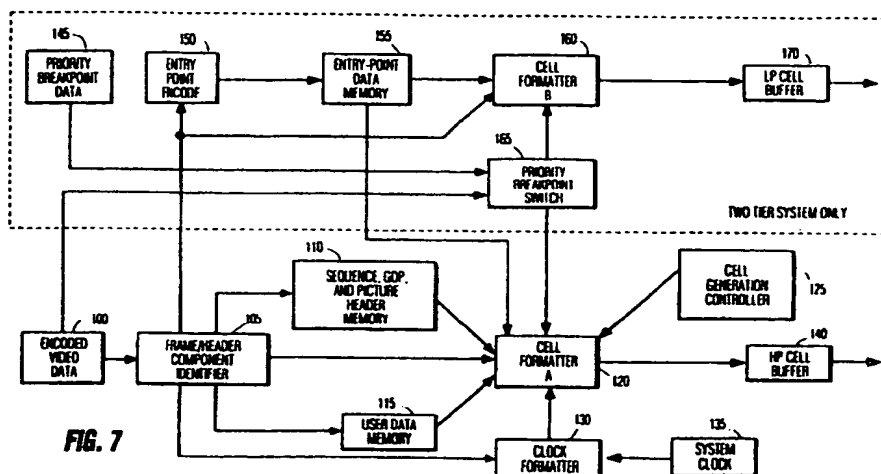


FIG. 7

EP 0 844 792 A3

This Page Blank (uspto)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 98 10 2501

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	US 5 122 875 A (RAYCHAUDHURI DIPANKAR ET AL) 16 June 1992	1,5-9,11	H04N7/50
Y	* column 12, line 1 - column 13, line 18; figure 6 *	2-4,10,12-18	H04N7/60
Y	--- MASAHIRO WADA: "SELECTIVE RECOVERY OF VIDEO PACKET LOSS USING ERROR CONCEALMENT" IEEE JOURNAL ON SELECTED AREAS IN COMMUNICATIONS, vol. 7, no. 5, June 1989, pages 807-814, XP000036749 * paragraph IV.B; figures 6,7 *	2,13,18	H04N7/66
Y	--- PATENT ABSTRACTS OF JAPAN vol. 016, no. 174 (E-1195), 27 April 1992 & JP 04 017422 A (MATSUSHITA ELECTRIC IND CO LTD), 22 January 1992 * abstract *	3,4,12-18	H04N7/54
Y	--- US 4 398 290 A (MATHIEU MICHEL ET AL) 9 August 1983 * the whole document *	10,14,16	H04N7/64
A	--- MINORU YONEDA ET AL: "AN EXPERIMENTAL DIGITAL VCR WITH NEW DCT-BASED BIT-RATE REDUCTION SYSTEM" IEEE TRANSACTIONS ON CONSUMER ELECTRONICS, vol. 37, no. 3, 1 August 1991, pages 275-282, XP000263196	5,6	TECHNICAL FIELDS SEARCHED (Int.Cl.6)
A	--- PATENT ABSTRACTS OF JAPAN vol. 009, no. 185 (E-332), 31 July 1985 & JP 60 053389 A (NIPPON HOSO KYOKAI), 27 March 1985 * abstract *	1,9,12,18	H04N
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 20 April 1999	Examiner Foglia, P
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (P04C01)

This Page Blank (uspto)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 98 10 2501

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	PATENT ABSTRACTS OF JAPAN vol. 014, no. 229 (E-0928), 15 May 1990 & JP 02 060261 A (FUJITSU LTD), 28 February 1990 * abstract *	12,18	
X	US 5 111 292 A (KURIACOSE JOSEPH ET AL) 5 May 1992	1	
A	* column 10, line 57 - column 12, line 10; figure 6 *	2-18	
A	EP 0 441 168 A (TELETTRA LAB TELEFON) 14 August 1991 * the whole document *	1-18	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
Place of search THE HAGUE		Date of completion of the search 20 April 1999	Examiner Foglia, P
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/82 (P04C01)

This Page Blank (uspto)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 10 2501

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-04-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5122875 A	16-06-1992	AT 149772 T	15-03-1997
		AU 660170 B	15-06-1995
		AU 1330992 A	06-10-1992
		BR 9205675 A	28-06-1994
		CN 1065567 A,B	21-10-1992
		CZ 9600028 A	15-01-1997
		CZ 9301730 A	15-06-1994
		DE 69217921 D	10-04-1997
		EG 20316 A	31-10-1998
		EP 0573517 A	15-12-1993
		ES 2098502 T	01-05-1997
		FI 933759 A	26-08-1993
		HU 65292 A	02-05-1994
		JP 6505378 T	16-06-1994
		MX 9200829 A	01-08-1992
		PL 168087 B	30-12-1995
		PL 168380 B	29-02-1996
		PT 100169 A	31-05-1994
		SK 67396 A	07-05-1997
		SK 92493 A	09-03-1994
		TR 26452 A	15-03-1995
		WO 9216071 A	17-09-1992
US 4398290 A	09-08-1983	FR 2484174 A	11-12-1981
		CA 1169937 A	26-06-1984
		EP 0041895 A	16-12-1981
		JP 1607520 C	13-06-1991
		JP 2032826 B	24-07-1990
		JP 57025751 A	10-02-1982
US 5111292 A	05-05-1992	DE 4205896 A	03-09-1992
		FR 2673796 A	11-09-1992
		GB 2254219 A,B	30-09-1992
		JP 5083684 A	02-04-1993
EP 0441168 A	14-08-1991	IT 1239072 B	21-09-1993
		IT 1240300 B	07-12-1993
		DE 69122634 D	21-11-1996
		DE 69122634 T	15-05-1997
		DK 441168 T	18-11-1996
		ES 2093649 T	01-01-1997
		GR 3021774 T	28-02-1997
		JP 5064174 A	12-03-1993
		US 5228028 A	13-07-1993

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

This Page Blank (uspto)

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 844 792 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
27.05.1998 Bulletin 1998/22

(51) Int. Cl.⁶: H04N 7/50, H04N 7/60,
H04N 7/66

(21) Application number: 98102501.8

(22) Date of filing: 20.05.1993

(84) Designated Contracting States:
DE ES FR GB IT PT

(30) Priority: 19.06.1992 US 901045

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
93911321.3 / 0 646 306

(71) Applicant:
GENERAL ELECTRIC COMPANY
Schenectady, NY 12345 (US)

(72) Inventors:

- Siracusa, Robert Justin
92648 Boulogne Cedex (FR)
- Zdepski, Joel Walter
92648 Boulogne Cedex (FR)

(74) Representative:

Ruellan-Lemonnier, Brigitte
THOMSON multimedia,
46 quai A. Le Gallo
92648 Boulogne Cédex (FR)

(54) **Method for arranging compressed video data for transmission over a noisy communication channel**

(57) A digital compressed video signal transmission system includes a transport processor (FIG. 7) for segmenting (105,115) compressed data into transport cells for transmission. Particular portions of the compressed data are formatted (110,120,125) into further transport cells, which further transport cells are interspersed with

normally occurring transport cells. The further transport cells include redundant video signal data which may be utilized to resynchronize a compressed video signal decoder after loss or corruption of transmitted data.

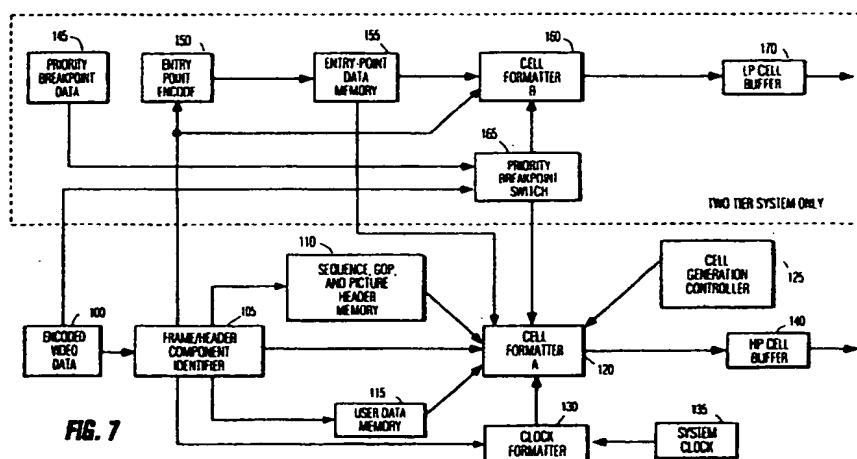


FIG. 7

EP 0 844 792 A2

Description

The present invention relates to a method and apparatus (or segmenting compressed video data into cells or packets for transmission in a manner to allow a receiver to rapidly recover from occurrences of missing data or corrupted data.

The Moving Picture Experts Group (MPEG) are establishing a standard for transmission and storage of video data primarily for use by computers. This proposed standard is detailed in the document "International Organization for Standardization", ISO-IEC JT(1/SC2/WG1), Coding of Moving Pictures and Associated Audio, MPEG 90/176 Rev.2, Dec. 18, 1990. The signal protocol is hierarchical or layered. Frames of video data are compressed in groups of, for example, 15 frames. Respective frames are either intraframe encoded (I frames), forward predictive interframe encoded (P frames) or forward/backward predictive interframe encoded (B frames). Each frame is divided into slices corresponding to horizontal image bands (e.g., 16 line stripes). The slices are segmented into macroblocks consisting of matrices of 16 by 16 pixels. The macroblocks are encoded in four 8 by 8 blocks of luminance values, and two 8 by 8 blocks of chrominance values (U and V signal components). Each of the 8 by 8 chrominance blocks are derived by horizontally and vertically subsampling component chrominance values representing respective 16 by 16 macroblocks. The signal protocol calls for a sequence layer for identifying the overall signal type, which layer includes a sequence start code and header information identifying for example, picture size, pixel aspect ratio, picture rate, bit rate, buffer size, a number of flag bits, etc. Following the sequence layer is a group of pictures, GOP header which include a start code, a time code, a closed GOP flag, a broken link flag and extension data. The next layer includes a picture start code and picture header. The picture (PICT) header includes a temporal reference, picture coding type (I, P, B), buffer fullness, vector and pixel precision flags, variable length code identifiers and extension data. A slice start code follows the picture layer and includes a start code and a header identifying the slice. Following the slice layer is the macroblock layer which includes a start code and header data. The macroblock header data includes identifying indicia, quantizing information, type of encoding etc. The macroblock layer also includes motion vectors which are common to the six blocks of data in each macroblock, and encoded block data on a block by block basis. The compression algorithm involves predicting frames of video signal from prior frames of video signal and transmitting in compressed form, the differences between actual and predicted frames. Successively encoded frames are dependent on the correctness of prior encoded frames. Only one or a small number of frames in a group of pictures is non predictively encoded. It should be immediately recognized that, in a receiver, decoding errors due to data loss or corruption during transmission will propagate through successive frames within a GOP. In order to preclude the propagation of such errors and concomitant image corruption special precautions must be taken. However such precautions are not included in the MPEG protocol because it was fashioned primarily for noiseless transmission channels.

ADTV is a fully digital simulcast system that delivers high definition television (HDTV) in a single 6-MHz broadcast channel. It is currently being developed by the Advanced Television Research Consortium (ATRC). One of the primary design goals of ADTV is to deliver high-quality and robust digital HDTV service for terrestrial simulcast transmission. The ADTV system uses MPEG compression to permit transmission of HDTV signals within a 6-Mhz channel. However the ATRC has augmented MPEG by adding a custom higher layer structure (MPEG++Rev 1) to achieve sufficient signal robustness for transmission over noisy terrestrial transmission media. This augmentation includes the prioritization of MPEG data into a two tier high-priority (HP), low priority (LP) transmission scheme, and includes a transport protocol to support multiple data services, and to provide graceful degradation in receiver performance in the presence of transmission errors.

DirectTV is a fully digital system that delivers standard definition NTSC television to the home over a satellite channel. It is currently being developed by Thomson Consumer Electronics (TCE). It is similar to ADTV in that it uses MPEG data compression but it is not HDTV. This is a one tier system, for transmitting NTSC quality television signals.

The present invention involves a transport protocol for arranging hierarchically formatted compressed video data for robust transmission in noisy communication channels and apparatus for realizing the transport protocol. The transport protocol presented here defines cells (or packets) of data where each cell includes a Prefix and a Transport Block. In an exemplary embodiment, the Prefix consists of four bits of control information and twelve bits for service channel identification. The Transport Blocks, (typically 128 bytes) consists of either Auxiliary data. Redundant MPEG Headers, or standard MPEG data. Compressed video data is applied to a transport processor which is responsive to the header data to develop transport block headers, and to store particular header data. The transport processor segments the compressed data into data blocks of predetermined size and appends transport headers thereto to form cells for transmission. The particular stored header data is formatted into a plurality of cells and these cells are interspersed between regularly occurring successive cells of compressed data.

The invention concerns, in a digital video transmission system for transmitting MPEG compressed video signal including layered data having headers containing data descriptive layers, a method for segmenting said compressed video signal into transport cells, said method comprising :

- providing said compressed video signal ;
- dividing said compressed video signal into payloads of no greater than a predetermined number of bits ;
- forming a first data field of N-bits, for identifying the service to which the transport cell is to be applied, where N is an integer such that $2N$ is greater than 4000 ;
- 5 - forming a second data field of 4-bits for including a continuity count which is service specific and which increments in successive transport cells of like service ;
- forming a third data field of 1-bit for including a priority flag which indicates the priority of associated payloads.

10 The invention concerns also, in a digital video transmission system for transmitting MPEG like compressed video signal including layered data having headers containing data descriptive of respective layers, a method for segmenting said compressed video signal into transport cells, said method comprising :

- providing said compressed video signal ;
- dividing said compressed video signal into payloads of video signal data ;
- 15 - forming a first layer header including at least a data field identifying a service to which the video signal is to be associated, and a data field indicating whether or not data contained within a transport cell is scrambled and a data field indicating a priority of the transport cell ;
- forming a second layer header including data fields which indicate ones of a plurality alternative types of data to follow such data field ;
- 20 - concatenating said first layer header, said second layer header and a payload for conveyance ;
- forming a fourth data field of 1-bit for including a flag indicating if an associated payload includes a predetermined signal boundary ;
- forming a fourth data field of 2-bits for including scrambling information ;
- forming a fifth data field of 2-bits for including a payload type identifier which indicates one of a plurality of alternative payload formats, and
- 25 - forming a transport cell including the concatenation of said first, second, third, fourth and fifth data fields and one of said payloads.

FIGURE 1 is a schematic representation of a transport cell (or packet) of the transport layer utilized in the invention.

30 FIGURE 2 is a schematic representation of a Transport Block for a video service included in a transport cell.

FIGURE 3 is a schematic representation of an example of a format of Auxiliary Data cells.

FIGURE 4 is a schematic representation illustrating an entry-point concept utilized for fast re-entry into the compressed data stream.

FIGURE 5 is a schematic representation of the entry-point data in two-tier transmission systems.

35 FIGURE 6 is a system level block diagram identifying the transport encoder and decoder in the total system.

FIGURE 7 is a block diagram of a typical transport encoder.

FIGURE 8 is a flowchart representing operation of the transport encoder.

FIGURE 9 is a block diagram of a typical transport decoder.

FIGURES 10A and 10B are a flowchart of operation of the transport decoder of a one-tier video system.

40

Detailed Description

The transport protocol of the present invention includes three data protocol layers; a link layer; a transport layer; and a service layer. The link layer is arranged to be service independent, while the service layers are service specific. 45 A "service" refers to the type of data being transmitted in a particular transport cell, e.g., audio data, video data, auxiliary data etc.

The link layer comprises a Prefix byte (actually two eight bit bytes) which contain several link layer control flags as well as channel identifiers for many different video, audio and data services. FIGURE 1 shows the logical structure of a transport cell indicating the relationship between the Prefix and the Transport Block. The designators P, BB, CF, and CS are all one bit designators. The designator, P, is used in a two tier system to identify whether the transport block includes high or low priority data ($1=HP$, $0=LP$), and is used in a one tier system for cell framing by toggling in successive cells. The designator, BB defines a bundle boundary and is set to a "1" value only for the first cell of respective bundles. The designator, CF, is a control flag used to indicate a scrambling state. CS is a control sync bit which toggles with each scramble key change.

55 The designation SCID is a twelve bit word which is used to identify service types. A SCID value of zero is reserved for null packets, and the value 4095 is reserved for future definition. The remaining 4094 SCID values are available for defining various service types.

FIGURE 2 illustrates the Video Transport Layer which is an example of one of many possible Transport Layer for-

5 mats. Every service type can have a specific Transport Block format. This description pertains to MPEG encoded Video Transport services. FIGURE 2 shows the logical structure of a transport block. The first field of the video transport layer contains a 4-bit continuity counter (CC). This counter increments by one for each cell transmitted. It is service dependent and priority dependent, i.e., separate counters are maintained for each service identity and for each transmission priority tier. The value of the continuity count sequences from 0 through 15. The continuity count provides a measure of error detection at respective receivers. A discontinuity in the received count indicates either errors in received data or a loss of continuous data for a particular transport service.

10 The next field in the video transport layer contains a 4-bit Header Designator (HD) which has two-bit subfields of Type and Identity. The subfields identify the form of data transmitted in the respective data field. For the Video Transport Layer, HD types 0, 1, 2 and 3 are used to respectively identify Auxiliary Packets, Basic Service Packets, Basic Service Packets with MPEG redundant data, and Basic Service Packets with NON_MPEG redundant data. The latter two types are non standard forms of transmitting MPEG data, and are included for completeness. The type "Basic Service Packets" is the only type identified which includes MPEG data in standard form albeit segmented in transport cells. The type "Auxiliary Packets" in general is not an MPEG signal though in this application it is used to transmit redundant MPEG header data. Nominally the Auxiliary Packets are used to transmit auxiliary data such as closed captioning data, for example.

15 The HD identity values define subsets of the HD types. One HD type/identity value combination (0/0) indicates an Auxiliary Data Group cell, and its contents are defined in FIGURE 3. The fields of auxiliary data cells are to be unscrambled, therefore PREFIX bit CF is set to one. Each Data Group is self defined, with a flag-bit indicating whether additional Data Groups exist in the same packet. Data Groups contain such information as Time Code References, and Scramble Keys.

20 Basic Service packets are used to carry most of the MPEG encoded data. Two-tier basic service packets include entry-point data to synchronize the two data streams. Entry-points allow data blocks to segment across cell boundaries. This concept is illustrated in FIGURE 4. FIGURE 5 shows the entry-point components found in the entry-point data field for two-tier transmission schemes. The frame type, slice, and macroblock identities are supplied by the video processor, while the entry pointer and frame number are supplied by the transport processor. The entry pointer is the byte offset to the entry-point position in the transport block. Frame type indicates whether the data refers to an intraframe encoded frame or an interframe encoded frame, or the first cell of a GOP. The frame number is used as a frame continuity counter, incrementing once per frame. Both the frame type and the frame number assist decoder synchronization of the two-tier data streams. The slice and macroblock identities are unique over the frame, and specify the entry-point position without decoding the MPEG data stream. While having one entry-point per cell is a design goal, there is a wide range of data per slice dependent upon the priority channel and frame type. For further information on entry point processes, see U.S. Patent No. --- (RCA 86.317A - allowed)---.

30 Two methods of carrying redundant MPEG data in the Transport Block may be utilized. One method uses a specific Auxiliary Packet to carry a copy of the MPEG sequence Header (which could span multiple packets). The second method uses a modification of the Basic Service Transport Block to carry a copy of MPEG Group of Pictures (GOP) Header and Picture Header.

35 All information contained in the video service layer is supplied by the video encoder (and the priority processor in a two tier system). See U.S. Patent No. --- (RCA 86.317A - allowed)--- for a detailed description of a two tier system.

40 Specific formatting rules are required when encoding the Video Transport Block and are outlines below:

- For HD Types 1, 2, 3 the HD ID bit 1 is toggled on the first sequence header of a GOP, the start of a B-Frame, and the start of a P-Frame.
- A new cell is started at the beginning of a GOP (assuming GOP begins with an I-Frame), and the beginning of respective successive frames.
- A "Basic Service" transport block format is used on the first cell of a GOP, and the first cell of respective successive frames.
- A "Redundant Data" transport block format is used instead of the "Basic Service" format on the second packet of a frame if the frame spans multiple packets. The "Redundant Data" format is used again at an interval of about 4 to 8 times per frame.
- The redundant transmissions of the MPEG Sequence header are carried as "Auxiliary Packets" at an interval of 5 to 30 per second.

55 FIGURE 6 is a block diagram of MPEG encoding apparatus including a transport encoder according to the present invention. The transport encoder takes a MPEG data stream and attaches a protocol which:

- Allows a transport decoder to detect missing or invalid data;
- Offers redundant transmission of critical data; and

- Indicates data reentry points to restart MPEG decoding.

Input to the transport encoder 12 is either directly from an MPEG encoder 10 (for a one tier transmission system) or from a MPEG priority processor 11 (for a two tier transmission system). In two tier systems, two separate data paths are used, one for high-priority (HP) and one for low-priority (LP) data. The priority processor monitors rate buffer fullness, and generates priority-breakpoints which indicate where in the data stream data is split between the HP and LP data paths for each slice of MPEG data. The breakpoint data, along with the MPEG encoded data is the input data to the transport encoder 12. MPEG codewords arrive at the input of the transport encoder tagged with data word length indicia and data type indicia (e.g., header data, motion vectors, discrete cosine transform coefficients etc.). A further input to the transport encoder is provided by a system clock 13. This clock is incorporated to genlock the receiver and transmitter so decoder rate buffers do not overflow or underflow.

Output from the transport encoder 12 is sent to a service multiplexer and rate buffer 15 via a data scrambling mechanism 14. The multiplexer 15 interleaves data from different service sources. The output from the multiplexer 15 is applied to the communications channel via a transmitter 16.

A transport decoder 20 receives cells from the communication channel receiver 17 via the service demultiplexer and rate buffer 18. The demultiplexer responsive to the data in the service type field of the transport cell header, separates data of different service types, and applies the separated data types to the appropriate processing circuitry. Video output data from the demultiplexer 18 is coupled to a descrambler 19 which performs a descrambling function which is inverse to the scrambling function of element 14. Descrambled data is applied to a transport decoder 20, which separates header data from service data and applies the service data to a decoder 22.

Output from the transport decoder 20 provides both a system clock (21) for synchronizing the receiver to the transmitting service, and a data path to the MPEG decoder 22. Within the transport decoder, error checks are performed to determine whether a cell has been lost or includes errors. For example, the CC code is monitored to determine if respective transport cells occur in proper sequence. Only transport cells for which no errors are detected are delivered to the MPEG decoder. The transport decoder strips off the Entry-Point Data from the transport block, decodes this header, and presents data to the MPEG decoder in a suitable format. If there is a cell discontinuity, the video transport decoder is programmed to initiate a sequence of resynchronizing tasks, as discussed below.

FIGURE 7 is a block diagram of a typical transport encoder. For one-tier transmission systems, components 145-170 are not included. For two-tier systems, all components in FIGURE 7 are used.

One-tier systems:

Encoded video codewords, and corresponding codeword identifying indicia related to codeword type, and codeword length arrive at the transport encoder from the video encoder 100. Element 105, responsive to the identifying indicia captures and stores certain of the header information in a memory element 110. Data stored in element 110 will be included in the transmitted data a plurality of times to provide a degree of information redundancy. The data selected for redundant transmission generally includes sequence header data. GOP header data, and Picture header (PICT) data. At a minimum the data selected as redundant data is that data necessary to condition an MPEG decoder to begin decoding a data stream which has been entered at other than the beginning of a data sequence.

Nominally a sequence may include a large number of GOP's. Decoding of transmitted MPEG data requires use of the sequence header data. If the user tunes into the data after the occurrence of the sequence header, he may not be able to decode the subsequent data. The transport protocol described herein repeatedly provides sequence and other needed header data for decoding shortly after entering the transmitted data stream no matter where it is entered.

Element 105 also extracts user data and applies this data to a memory 115. User data may be of many different types such as time stamps; whether the images are in color or not; the form of chrominance preprocessing; whether the original source material was film mode or video mode etc.. The MPEG protocol does not support inclusion of these types of information. However inclusion of such information permits the receiver designer to incorporate special processing for particular signal types and thereby enhance the overall reproduction of images. The user data is included in auxiliary transport cells, when convenient.

Element 105 provides header identifying indicia to a clock formatter 130. Clock formatter 130 includes a clock which is sampled on the occurrence of certain header data to generate time stamps associated with the corresponding header data. These time stamps are used in receiver apparatus to provide a measure of signal synchronization.

Data from elements 105, 110, 115 and 130 are coupled to a cell formatter 120. Nominally formatter 120 receives data from element 105, parses such data into cell length packages, develops the appropriate video service transport headers according to the protocol indicated in FIGURES 1 and 2, concatenates the transport headers and the cell data, and couples the transport cells to a cell buffer 140. However, at the start of a sequence of data, and periodically during the transmission of data, the formatter is conditioned by the controller 125 to form and transmit other data. This other data includes auxiliary information such as time stamps from the clock formatter 130 for signal synchronization, and

redundant header data stored in memory element 110.

Auxiliary data cells are generated as needed and included in the data stream when space is available. That is, auxiliary data cells may be interleaved with video data in any of the I, P or B field data. On the other hand redundant data is for the most part interleaved only with I field video data. This is because decoding of video data must start with an I field. All other fields of MPEG data are predictive and depend from I fields. The redundant data cells may be included at regularly spaced intervals or as data space is available but with at least a certain minimum inclusion of data to provide enough information to indicate decoding.

The cell formatter includes a continuity count in each transport cell regardless of type. The continuity count, CC, is incremented by one unit in successive cells and repeats modulo N, where N may be a convenient binary number such as 16.

Two-tier systems:

Operation of the transport encoder in a two-tier system includes all functions described for a one-tier system, with the one-tier functions applied to the high priority or HP channel. In addition to the encoded video data provided at block 100, the priority processor (FIGURE 6), provides priority breakpoint data which is stored in element 145. The breakpoint data is constant over a slice of MPEG data and indicates a threshold of what data (codewords) are placed on the HP channel and what data are placed on the LP channel. The priority breakpoint data is applied to a switch 165 which compares the breakpoint information stored in element 145 with the current codeword identity provided by element 100, and supplies data codewords to either cell formatter 120 or cell formatter 160 for generation of either HP or LP transport cells respectively.

The element 105 provides header data to a functional element 150 which develops entry-point definitions for both HP and LP data. These entry point definitions are stored in entry-point data memory 155. Cell formatters 120 and 160 create entry-point data for each cell generated. The entry-point is used by the decoder to resume decoding of the variable length data after a packet loss due to transmission errors. Completely formatted packets are sent from the LP cell formatter 160 to a cell buffer 170 for output.

Referring to the flowchart of FIGURE 8, the controller 125 initializes the system (850) by resetting the continuity counters (CC) and a cell count. It then checks (852) for an auxiliary data interrupt. These interrupts allow the user to interpose special information (if desired) for transmission. If an auxiliary interrupt has occurred, an auxiliary cell is created (854) and coupled to the rate buffer, and the auxiliary CC is incremented. If there is currently no channel space available, the system is directed to access MPEG data (856).

The MPEG data is checked for the occurrence of a sequence header (858). If a sequence header is available, a basic cell type is created (860) using the sequence header data. The basic cell continuity counter is incremented (862) and the cell is output (864) to the rate buffer. Following creation of the basic cell type with the sequence header data, N auxiliary type cells are created using the sequence header data. Here N is a small integer such as four. Each of the N auxiliary type cells are output, and the auxiliary continuity count is incremented with the production of each cell.

Alternatively, if sequence header data is not available, a test is performed to determine the occurrence of group of picture (GOP) or picture (PICT) header data (870). If GOP/PICT header data is available the cell count is reset (872) and a redundant type cell is created with the GOP/PICT header data (873). If space is available within the cell further MPEG data is included. The cell is output and the redundant cell continuity count and the cell count are incremented. Note at tests 858 and 870 if sequence headers or GOP or PICT headers are available, they are stored in memory element 110 for use in forming redundant cells of the same data.

If at test 870 the current MPEG data is not GOP/PICT header data, the cell count is tested. If the cell count is not, for example, 2, 4 or 8 then a basic type cell is created with the current MPEG data. Alternatively, if the cell count is 2, 4 or 8 then a redundant type cell is created with the last occurring GOP/PICT header data.

Table I shows an exemplary sequence of transport cells.

TABLE I

RHD class	Packet Contents
Basic	Sequence Header or GOP Header with MPEG data
Aux	Redundant Sequence Header Transmission #1
Aux	Redundant Sequence Header Transmission #2
Aux	Redundant Sequence Header Transmission #N
Redundant	Redundant GOP/PICT Header + MPEG Data

TABLE I (continued)

RHD class	Packet Contents
Redundant	Redundant GOP/PICT Header + MPEG Data
Basic	MPEG Data
Redundant	Redundant GOP/PICT Header + MPEG Data
Basic	MPEG Data
Basic	MPEG Data
Basic	MPEG Data
Redundant	Redundant GOP/PICT Header + MPEG Data
Basic	MPEG Data
Basic	(...a number of MPEG data packets...)
:	:
Basic	Picture Header within MPEG Data
Redundant	Redundant GOP/PICT Header + MPEG Data
Redundant	Redundant GOP/PICT Header + MPEG Data
Basic	MPEG Data
Redundant	Redundant GOP/PICT Header + MPEG Data
Basic	MPEG Data
Basic	MPEG Data
Basic	MPEG Data
Redundant	Redundant GOP/PICT Header + MPEG Data
Basic	MPEG Data
Basic	(...a number of MPEG data packets...)
Basic	MPEG Data

Information (except video data) necessary to generate the sequence of transport cells shown in Table I is programmed into the cell formatter 120 and the controller 125. Responsive to respective start codes, the formatter and controller are conditioned to produce frame specific sequences of transport cells, and responsive to the type of transport cell to be generated appropriate transport header information is accessed from, e.g., internal memory or continuity counters. Also responsive to the programmed sequence, the controller and cell formatter are conditioned to process newly occurring compressed video data or stored header data. Note, once the transport cell sequence is established, forming the requisite transport cells involves simply time division multiplexing the relevant data.

FIGURE 9 is a block diagram of a typical transport decoder. For one-tier transmission systems, components 235-275 are not included. For two-tier systems, all components in FIGURE 9 are used. In both one and two-tier systems, a cell Continuity Counter (CC) provides a minimal indication of whether a cell has been lost or corrupted during transmission. Additional loss indications may be provided by error detecting CRC or FEC encoding/decoding surrounding respective transport cells. Only errorless transport cells are delivered to the video decoder. The video transport decoder removes entry-point data and transport header data from respective transport cells, decodes the entry and transport header data, and responsive thereto provides data to the MPEG decoder in a suitable format. If there is a cell discontinuity, the video transport decoder is conditioned to initiate a sequence of resynchronizing tasks, as discussed below.

One-tier systems:

Transport cells are provided to the transport decoder via a transport cell buffer 200. Programmed to respond to the encoded protocol, a cell parser 210 decodes the cell headers and separates respective service types of data. Auxiliary user data is directed to and stored in a memory 215. Redundant MPEG Sequence headers, GOP headers, and Picture headers are directed to and stored in a further memory 220. Normally occurring MPEG data (from basic service cells)

is passed to an output register 230 from which it is supplied to the MPEG decoder. Based on an indication of cell loss in function 205, and the redundant data stored in memory 220, the redundant data controller 225 will supply error tokens followed by the appropriate redundant data from memories 215 and 220, to condition the MPEG decoder to continue decoding or resynchronize.

Two-tier systems:

Operation of the transport decoder in a two-tier system includes all functions described for a one-tier system, with the one-tier functions applied to the HP channel. With a two-tier system, a second stream of low priority transport cells is available from the descrambler 19. These low priority transport cells are applied to a cell parser 245 via a cell buffer 235. MPEG data from the LP cell parser 245 is coupled to the MPEG decoder from the parser 245 via an output register 275. Both HP and LP cell parsers (210 and 245 respectively), extract entry point and transport header data from occurring transport cells. The HP and LP entry data are stored in memories 265 and 270 respectively. If no cell loss is indicated by the continuity count the entry data is subsequently discarded. If cell loss is indicated the entry point data is utilized to re-enter the respective data streams at the next decodable piece of data. Re-entry is performed by elements 255 (LP), 260 (HP) and the resynchronization logic 250. The resynchronization logic, during a resync cycle, in effect conditions the respective cell parsers to skip/discard data to an entry point, and thereafter apply the next successive data to the registers 275 or 230 as appropriate. For example, a HP cell loss would require resync logic 250 to condition the cell parser 210 to skip over bits in the next good packet until positioned at the entry-point of that cell designated by the transport header. Then data at that HP entry-point is provided to output register 230. An LP cell loss would require the resync logic 250 to request cell parser 245 to jump to the next entry-point that is ahead of or equal to the HP entry-point. Data subsequent this entry point is then coupled to the register 275.

FIGURE 10 shows a typical transport decoder algorithm for a one tier video system. This algorithm includes an initialization sequence (300), and functions to process each packet (beginning at 400). This example assumes a particular retransmission policy for redundant Sequence Layer, and redundant GOP+PICT headers: Redundant GOP+PICT headers are transmitted on any frame: redundant Sequence Layer, and redundant GOP+PICT headers are transmitted only in I frames, and when redundant GOP+PICT headers are transmitted during an I frame, they have second priority to Redundant Sequence Headers.

The initialization sequence 300, sets (301, 302) two flags, which control waiting for redundant MPEG data in the transport protocol, to a "false state.". Initialization also produces (303) an error code to the MPEG decoder, so that the MPEG decoder is conditioned to wait for the next start-code when decoding resumes.

On completion of initialization, the system begins (400) the processing respective transport cells. In this example, there are three possible processing paths dependent upon the state of the Header Designator (HD) in the respective cell. For HD type 0 (Aux cells), processing begins at decision stage (500), for HD type 1 (Basic cells), processing begins at decision stage (700), and for HD Type 2 (Redundant Cells), processing begins at decision stage (800). There is a check for lost cell continuity at decision stage (600) before processing of the MPEG data cells begins at points (700) and (800).

Auxiliary cell processing begins at decision stage (500). Here a test is done on the AUX Header Designator Identity. If the identity is 0 (test 510), then this cell contains an auxiliary data group, and the cell is processed at function (515). If at test (510), the Identity is not 0, then a test (520) is employed to determine if the decoder is waiting to recover redundant Sequence Header information. If not, the algorithm proceeds to the next packet at (400). If a Sequence Header is needed, and this cell marks the start of a Sequence Header (test 530), then the decoder initializes the processing of this header (535), checks to see if processing is completed at test (560), (for the case where all Sequence Header data was contained in one packet), and if so, sets the waiting-flag to false, outputs the header (570), and then provides another error token (575). This error token conditions the MPEG decoder to be prepared to start processing at a new entry-point. During the capture of a multiple cell AUX Sequence Header, a check on the cell continuity is performed (540). If there has been a loss, the Sequence Header processing is reset (545), else data is extracted from the AUX cell to continue processing of the Sequence Header (550). Thereafter the sequence header is again checked for completeness (560).

Before MPEG data packets are used, a check is made (600) for lost continuity. If there is a loss, an error code is provided (605) to the MPEG decoder and a check is made (610) for entering a new frame. If a new frame has been started during the loss, control flags are set true (615, 620) waiting for redundant MPEG headers.

If the packet is a Basic cell type (test 700), a check is made (710) to determine if the decoder is in a state waiting for redundant GOP+PICT headers (710). If it is not waiting for redundant headers, the MPEG data cell is forwarded (715) to the MPEG decoder. If the decoder is waiting for redundant headers, a check is performed (720) to determine if the current cell has the needed header embedded in the MPEG stream. The start of all frames is cell aligned, so if the first 32 bits of the cell is a MPEG start code, the needed headers will be available to the MPEG decoder within the MPEG stream. If the decoder is waiting for a redundant header, and it is not embedded, then the good packet is skipped

(725). If the decoder is waiting for a redundant header, and it is embedded, the control flags waiting for redundant headers are set false, and the packet is forwarded (730) to the MPEG decoder.

If the cell is a Redundant cell type (test 800), and the transport decoder is not waiting for redundant information (810), the redundant data is skipped (815), and the remaining data in this cell is forwarded to the MPEG decoder. If the cell is a Redundant cell type (test 800), and the transport decoder is waiting for redundant information (test 810), the control flags waiting for redundant headers are set false, the redundant header information from this cell is forwarded (820) to the MPEG decoder, followed by an error token (825), so that the MPEG decoder will look for the next start-code then decoding resumes. And finally the MPEG data of this packet is extracted and forwarded (830) to the MPEG decoder.

Claims

1. In a digital video transmission system for transmitting MPEG- like compressed video signal including layered data having headers containing data descriptive of respective layers, a method for segmenting said compressed video signal into transport cells comprising:

providing said compressed video signal;
dividing said compressed video signal into payloads of video signal data;
forming a first layer header including at least a data field identifying a service to which the video signal is to be associated, and a data field indicating whether or not data contained within a transport cell is scrambled, and a data field indicating a priority of the transport cell;
forming a second layer header including data fields which indicate ones of a plurality alternative types of data to follow such data field;
concatenating said first layer header, said second layer header and a payload for conveyance.

2. The method set forth in claim 1 wherein the step of dividing compressed video signal into payloads starts ones of said payloads with the beginning of predetermined frames of said compressed video signal; and
the step of forming said first layer header includes forming a further field indicating whether a predetermined signal boundary is contained within a payload.

3. The method set forth in claim 1 wherein the step of forming a first layer header includes providing two data fields relating to whether data is scrambled, the first of which indicates whether or not data is scrambled and the second of which indicates alternative scrambling keys.

4. The method set forth in claim 3 further including

determining locations of decoding entry points within respective payloads;
forming a data field descriptive of locations of respective said entry points; and
concatenating said data field with a second layer header and payload.

5. The method set forth in claim 1 further including

determining locations of decoding entry points within respective payloads;
forming a data field within respective payloads descriptive of locations of respective said entry points.

6. The method set forth in claim 1 further including:

forming a further header including a data field which indicates the number of bytes of a predetermined type of data included within a payload; and
concatenating said further header with said second layer header.

7. The method set forth in claim 1 further including:

forming a service layer of one of an auxiliary and a basic service format; and
concatenating said service layer with said transport layer header.

8. The method set forth in claim 7 wherein the step of forming a service layer comprises:

determining the type of compressed video signal contained in respective payloads and locations of decoding entry points within respective payloads;
forming a service layer header which includes a data field to identify said type of compressed video signal in a respective payload, and a data field descriptive of locations of respective said entry points.

9. The method set forth in claim 7 wherein the step of forming said service layer comprises:

forming auxiliary packs respectively including auxiliary data and auxiliary data identifiers; and
concatenating a variable number of said auxiliary packs to form said service layer.

10. The method set forth in claim 1 or 7 wherein the stop of forming respectively said second or said service layer includes:

forming a data field including a continuity count which is service specific and which increments in successive transport cells of a same service; and
forming a data field which indicates one of a plurality of alternative data formats selected for a respective service.

11. The method set forth in claim 1 wherein the step of forming said second layer header further comprises including a field having a bit which indicates the occurrence of one of a first sequence header of a GOP, the start of a B-Frame, and the start of a P-Frame within respective payloads.

12. The method set forth in claim 1 wherein the step of forming a first layer header comprises:

forming a first data field (SCID) of N-bits, for identifying the service to which the transport cell is to be applied, where N is an integer such that 2N is greater than 4000;
forming a second data field (P) of 1-bit for including a priority flag which indicates the priority of associated payloads;
forming a third data field (CF, CS) of 2-bits for including scrambling information, a first of said two bits indicating whether data is scrambled and a second of said two bits indicating which of alternative scrambling keys was used..

13. The method set forth in claim 12 wherein the step of forming a first layer header further comprises:

forming a fourth data field (BB) of 1-bit for including a flag indicating if an associated payload includes a pre-determined signal boundary.

14. The method set forth in claim 13 further including:

forming a data field (CC) of 4-bits for including a continuity count which is service specific and which increments in successive transport cells of like service, and
concatenating said data field (CC) with said first and second layer headers.

15. The method set forth in claim 12 wherein the step of forming a second layer header further comprises:

determining whether a respective payload of compressed video signal contains a decompression entry point;
forming a further data field including entry point information.

16. The method set forth in claim 12 further including:

forming a data field (CC) of 4-bits for including a continuity count which is service specific and which increments in successive transport cells of like service, and
concatenating said data field (CC) with said first and second layer headers.

17. The method set forth in claim 16 wherein said method further includes:

forming data auxiliary to said compressed video signal;
forming a further data field of 16-bits (two bytes) including information identifying associated said data auxiliary

to said compressed video signal;

forming an auxiliary payload including said further data field and said data auxiliary to said compressed video signal; and

forming a transport cell including the concatenation of said first layer header, second layer header and said auxiliary payload.

18. In a digital video transmission system for transmitting MPEG compressed video signal including layered data having headers containing data descriptive of respective layers, a method for segmenting said compressed video signal into transport cells, comprising:

providing said compressed video signal;

dividing said compressed video signal into payloads of no greater than a predetermined number of bits;

forming a first data field (SCID) of N-bits, for identifying the service to which the transport cell is to be applied, where N is an integer such that 2N is greater than 4000;

forming a second data field (CC) of 4-bits for including a continuity count which is service specific and which increments in successive transport cells of like service;

forming a third data field (P) of 1-bit for including a priority flag which indicates the priority of associated payloads;

forming a fourth data field (BB) of 1-bit for including a flag indicating if an associated payload includes a predetermined signal boundary;


forming a fourth data field (CF, CS) of 2-bits for including scrambling information;

forming a fifth data field (TYPE) of 2-bits for including a payload type identifier which indicates one of a plurality of alternative payload formats; and


forming a transport cell including the concatenation of said first, second, third, fourth, and fifth data fields and one of said payloads.

This Page Blank (uspto)

FIG. 1
LINK LAYER

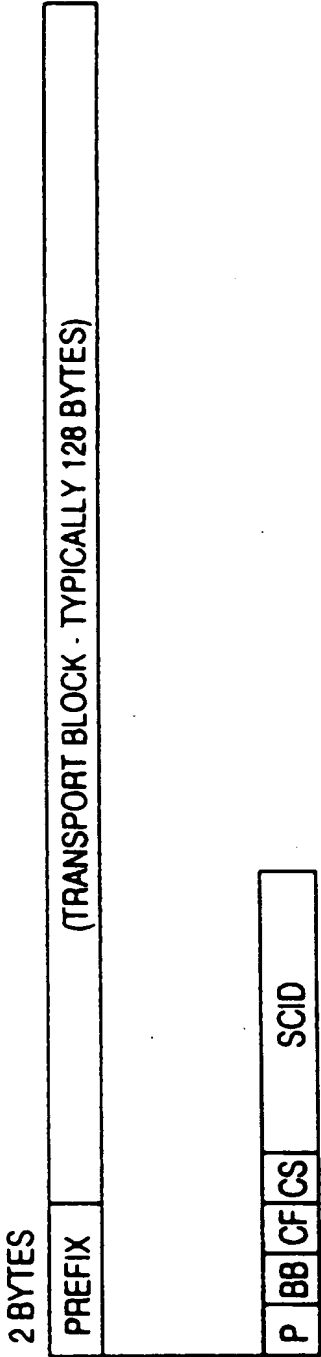

This Page Blank (uspto)

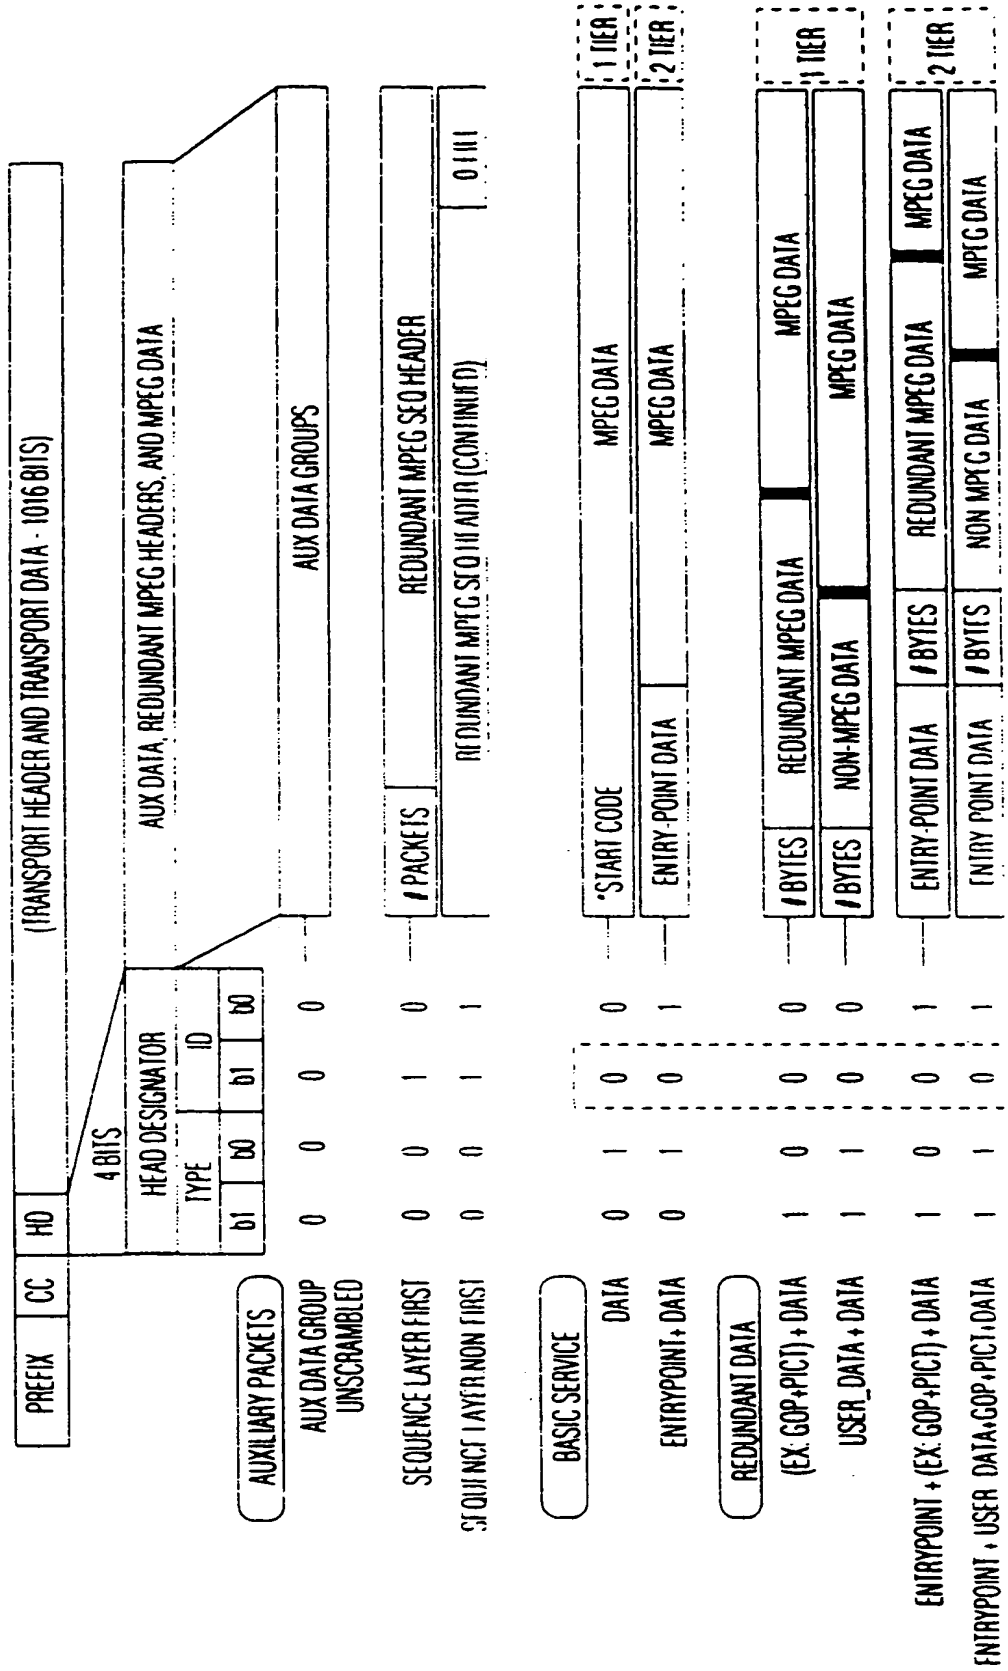FIG. 2 VIDEO TRANSPORT LAYER - 1 & 2 TIER SYSTEMS

This Page Blank (uspto)

FIG. 3

AUXILIARY DATA GROUP FORMAT

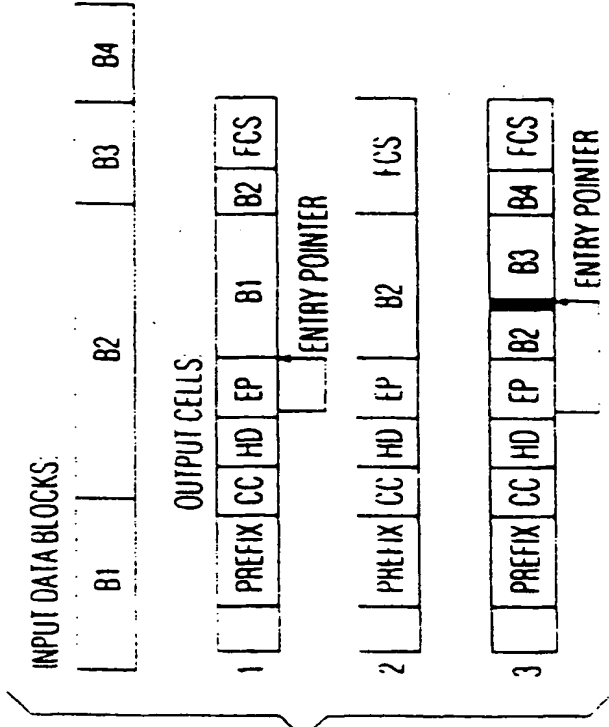
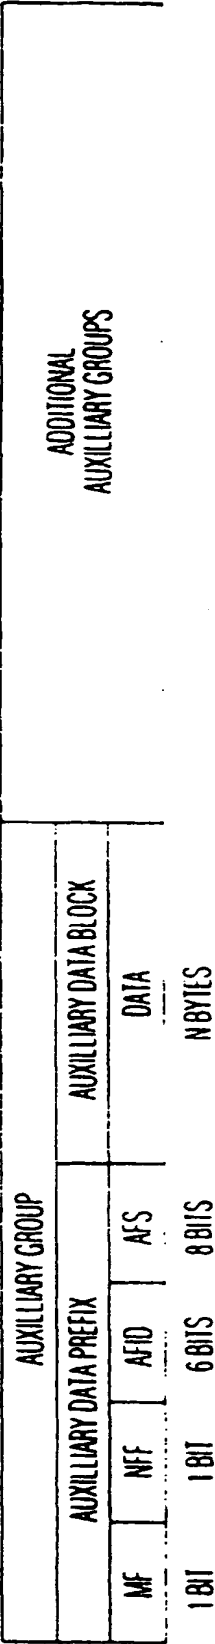


FIG. 4

This Page Blank (uspto)

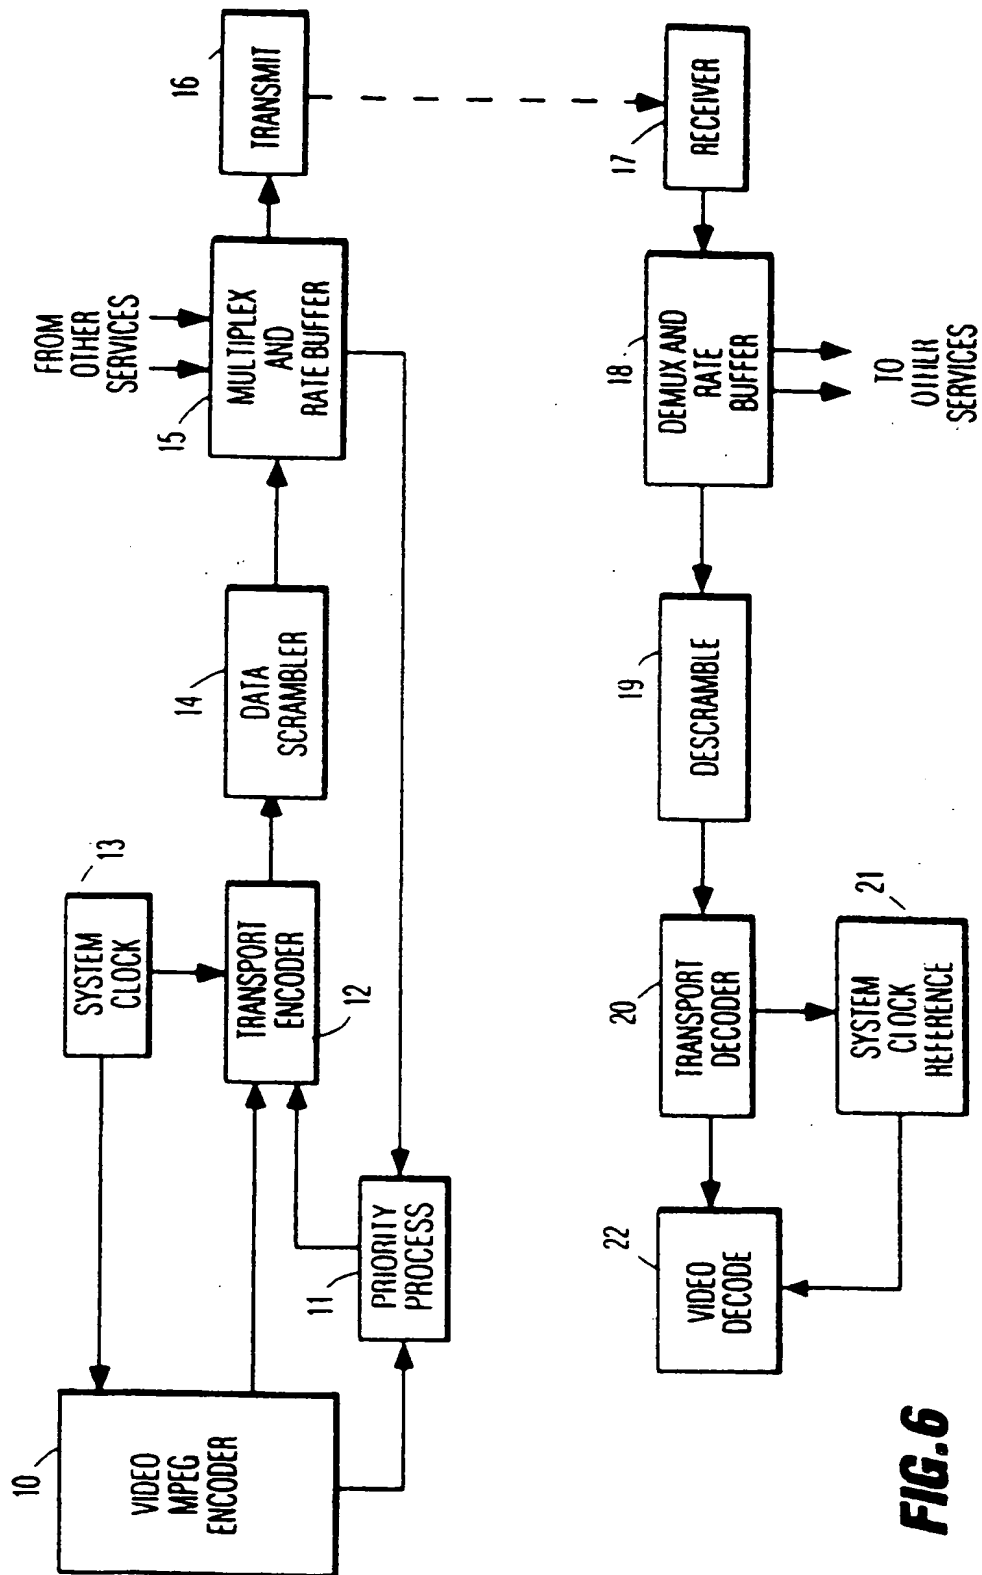
This Page Blank (uspto)

FIG. 5

VIDEO TRANSPORT LEVEL
2 TIER ENTRY-POINT HEADER FORMAT

ENTRY-POINT DATA (32 BITS)				
ENTRY POINTER	FRAME TYPE	FRAME NUMBER	UNASSIGNED	SLICE/MBLK ID
7 BITS	2 BITS	5 BITS	5 BITS	13 BITS

This Page Blank (uspto)

**FIG. 6**

This Page Blank (uspto)

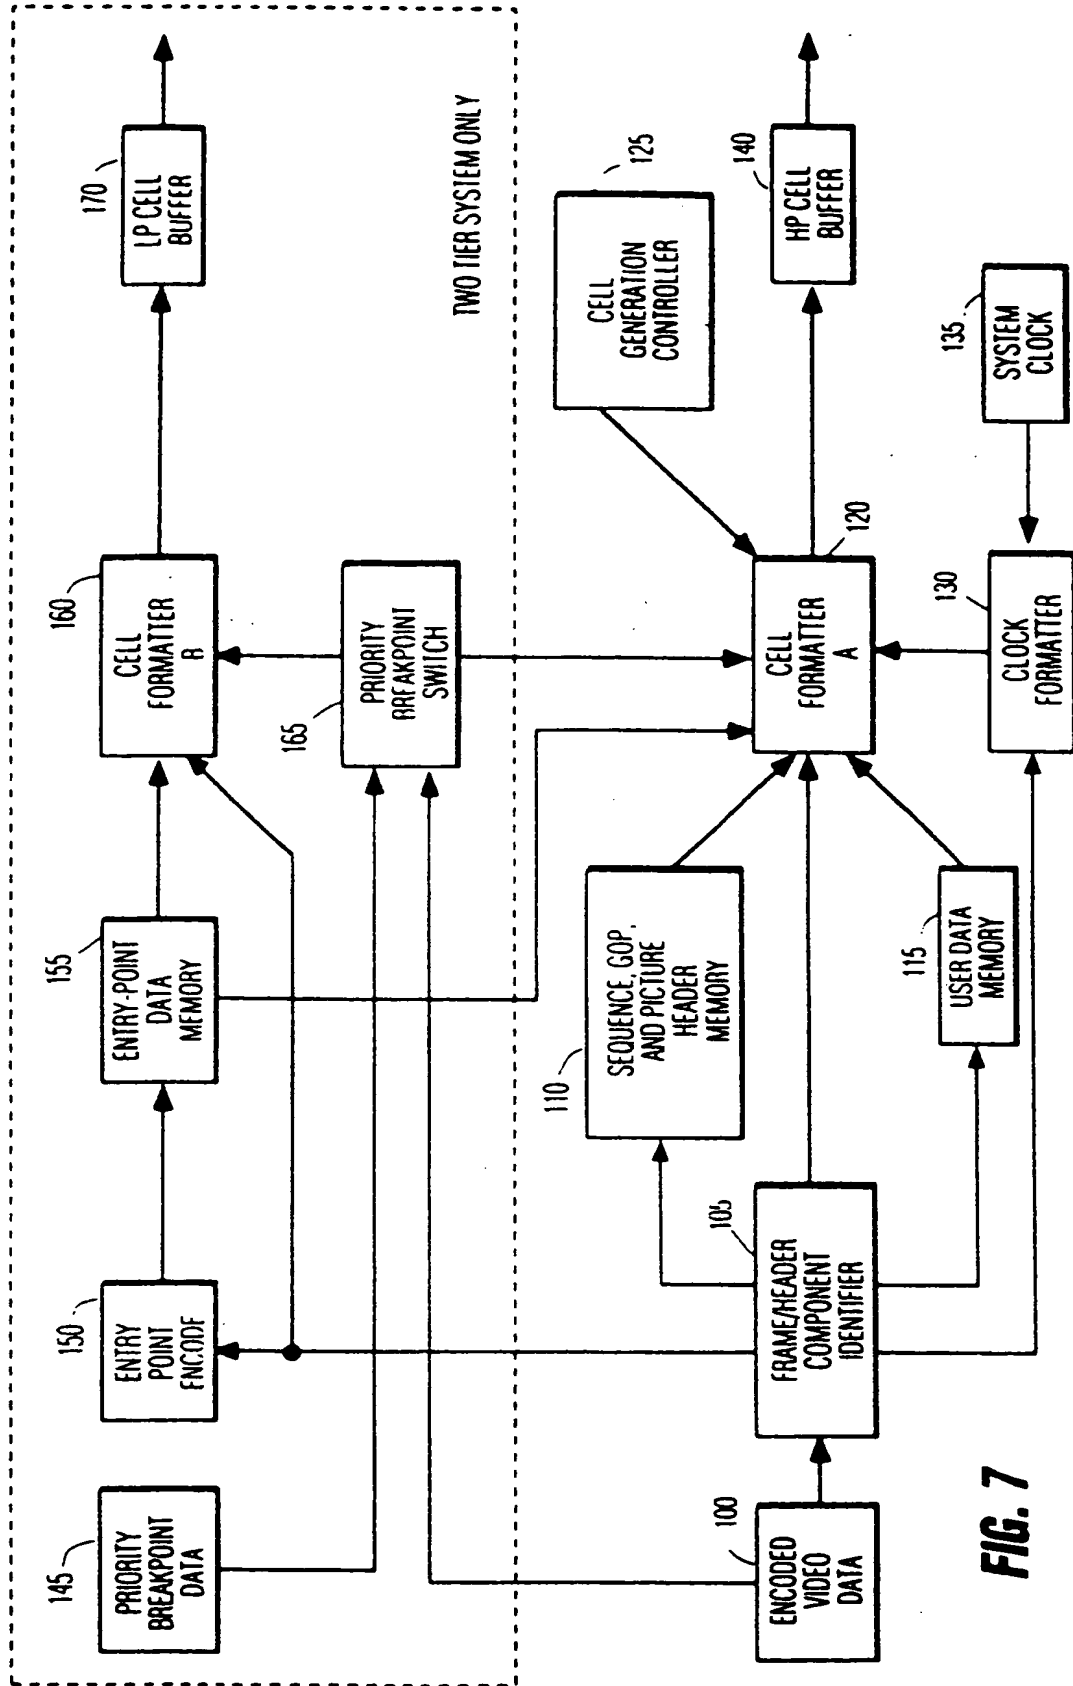
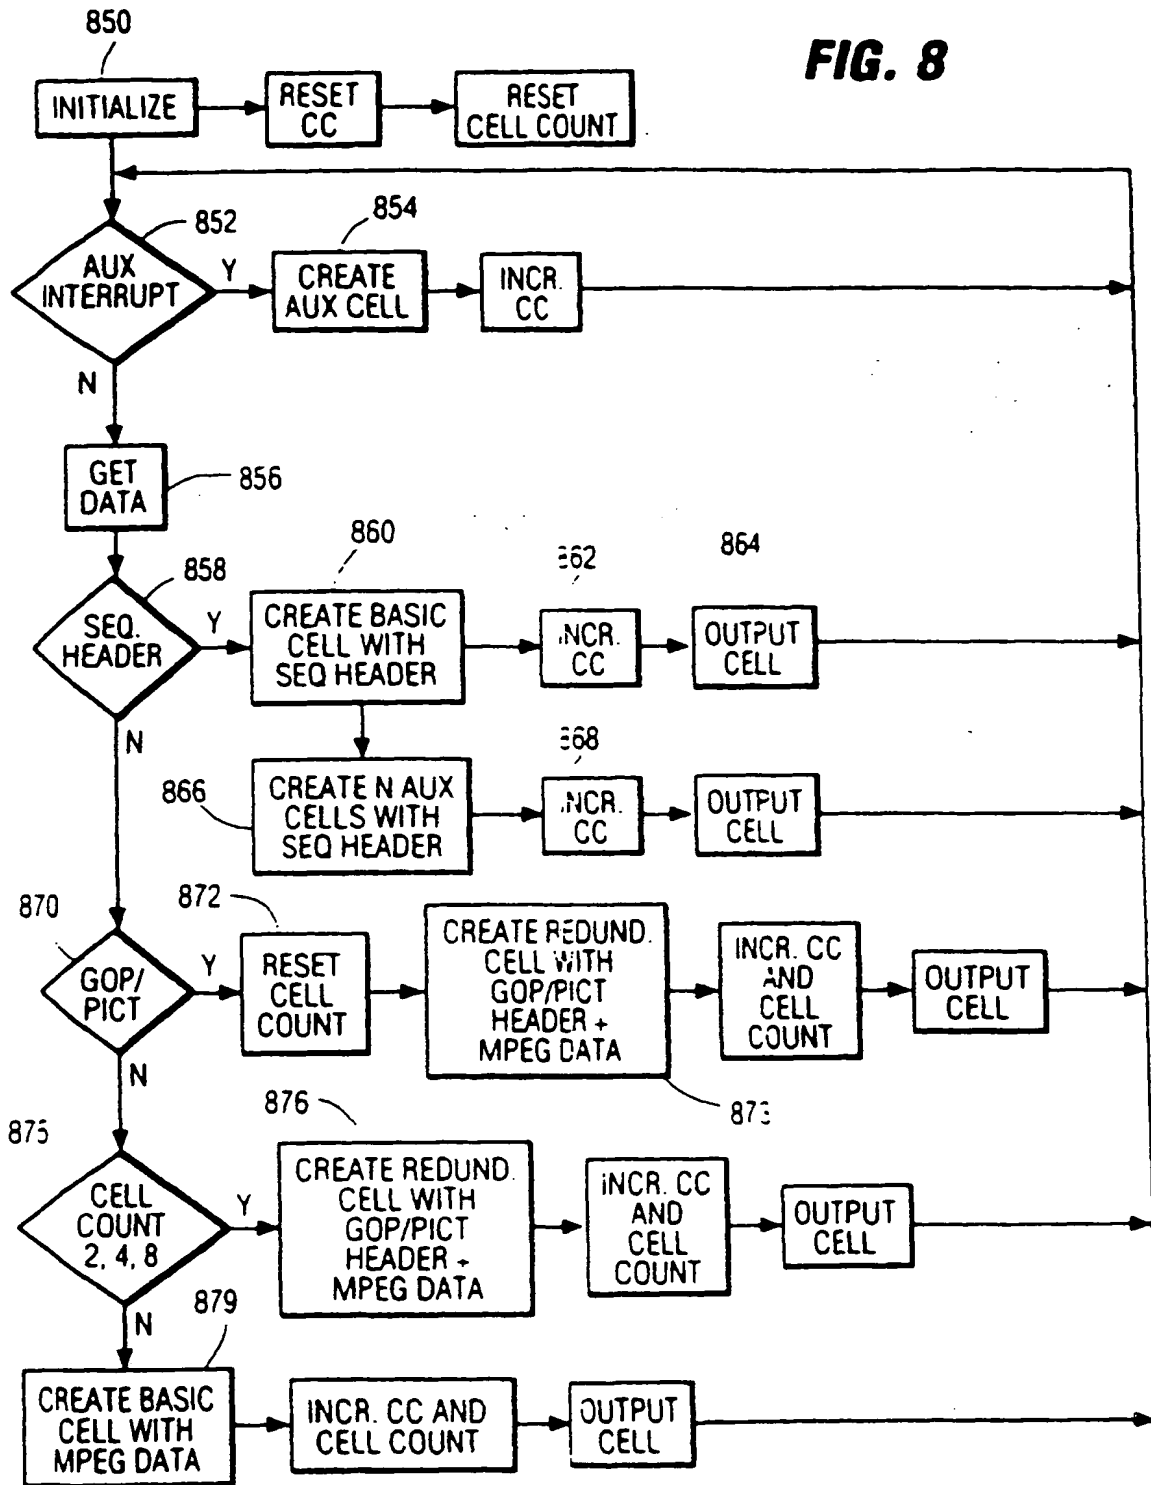


FIG. 7

This Page Blank (uspto)

FIG. 8

This Page Blank (uspto)

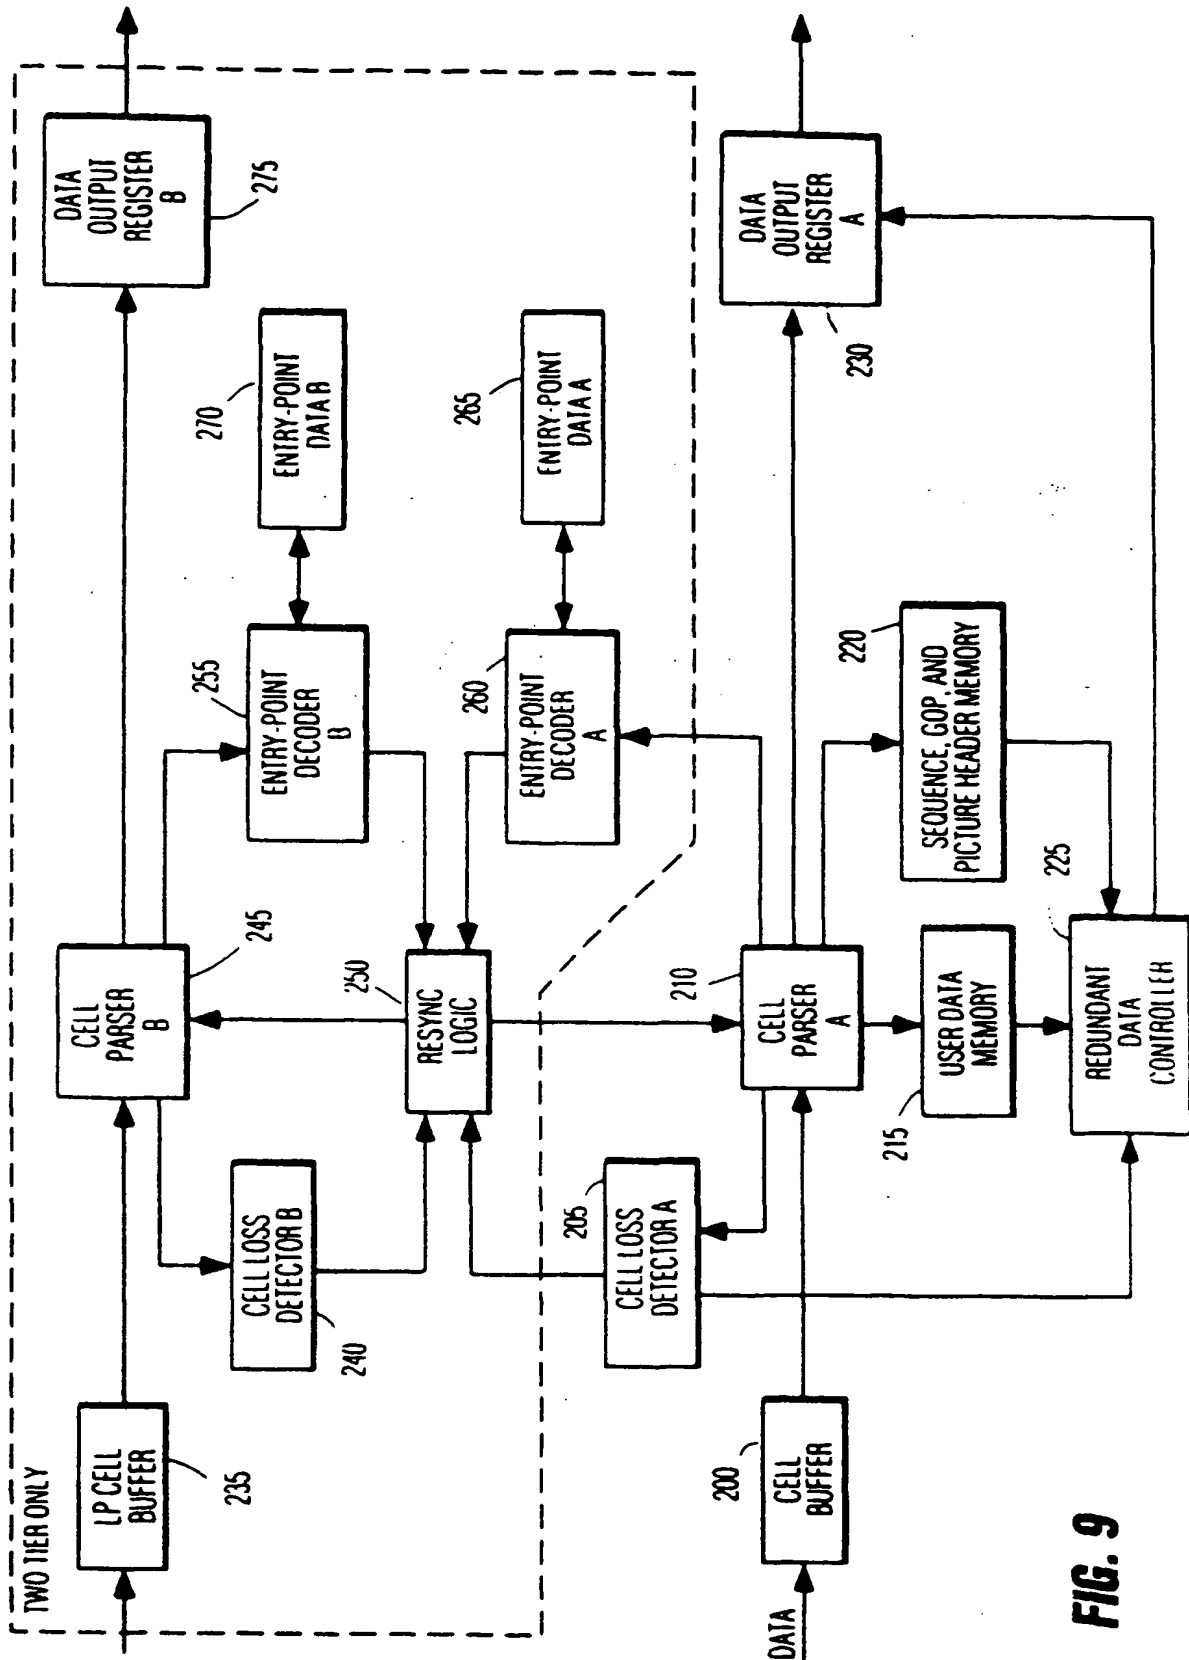
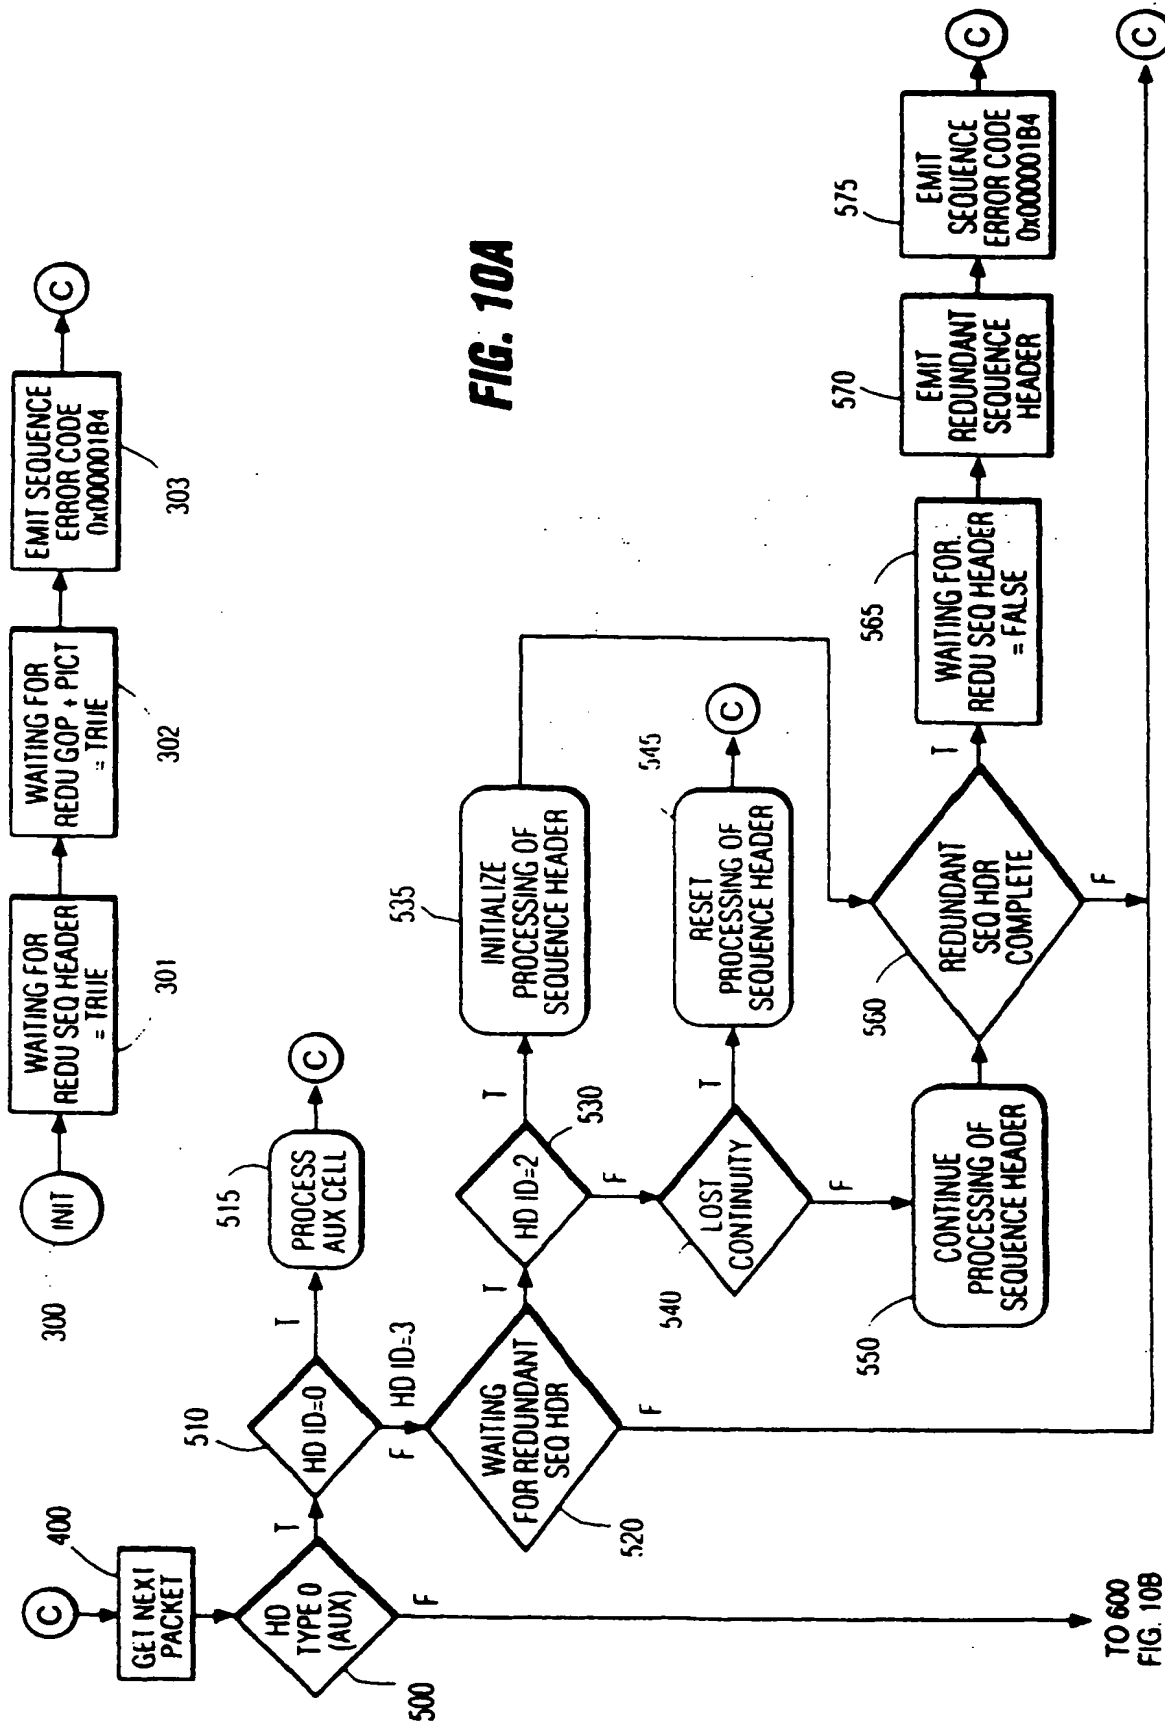



FIG. 9

This Page Blank (uspto)

TO 600
FIG. 10B

This Page Blank (uspto)

FIG. 10B

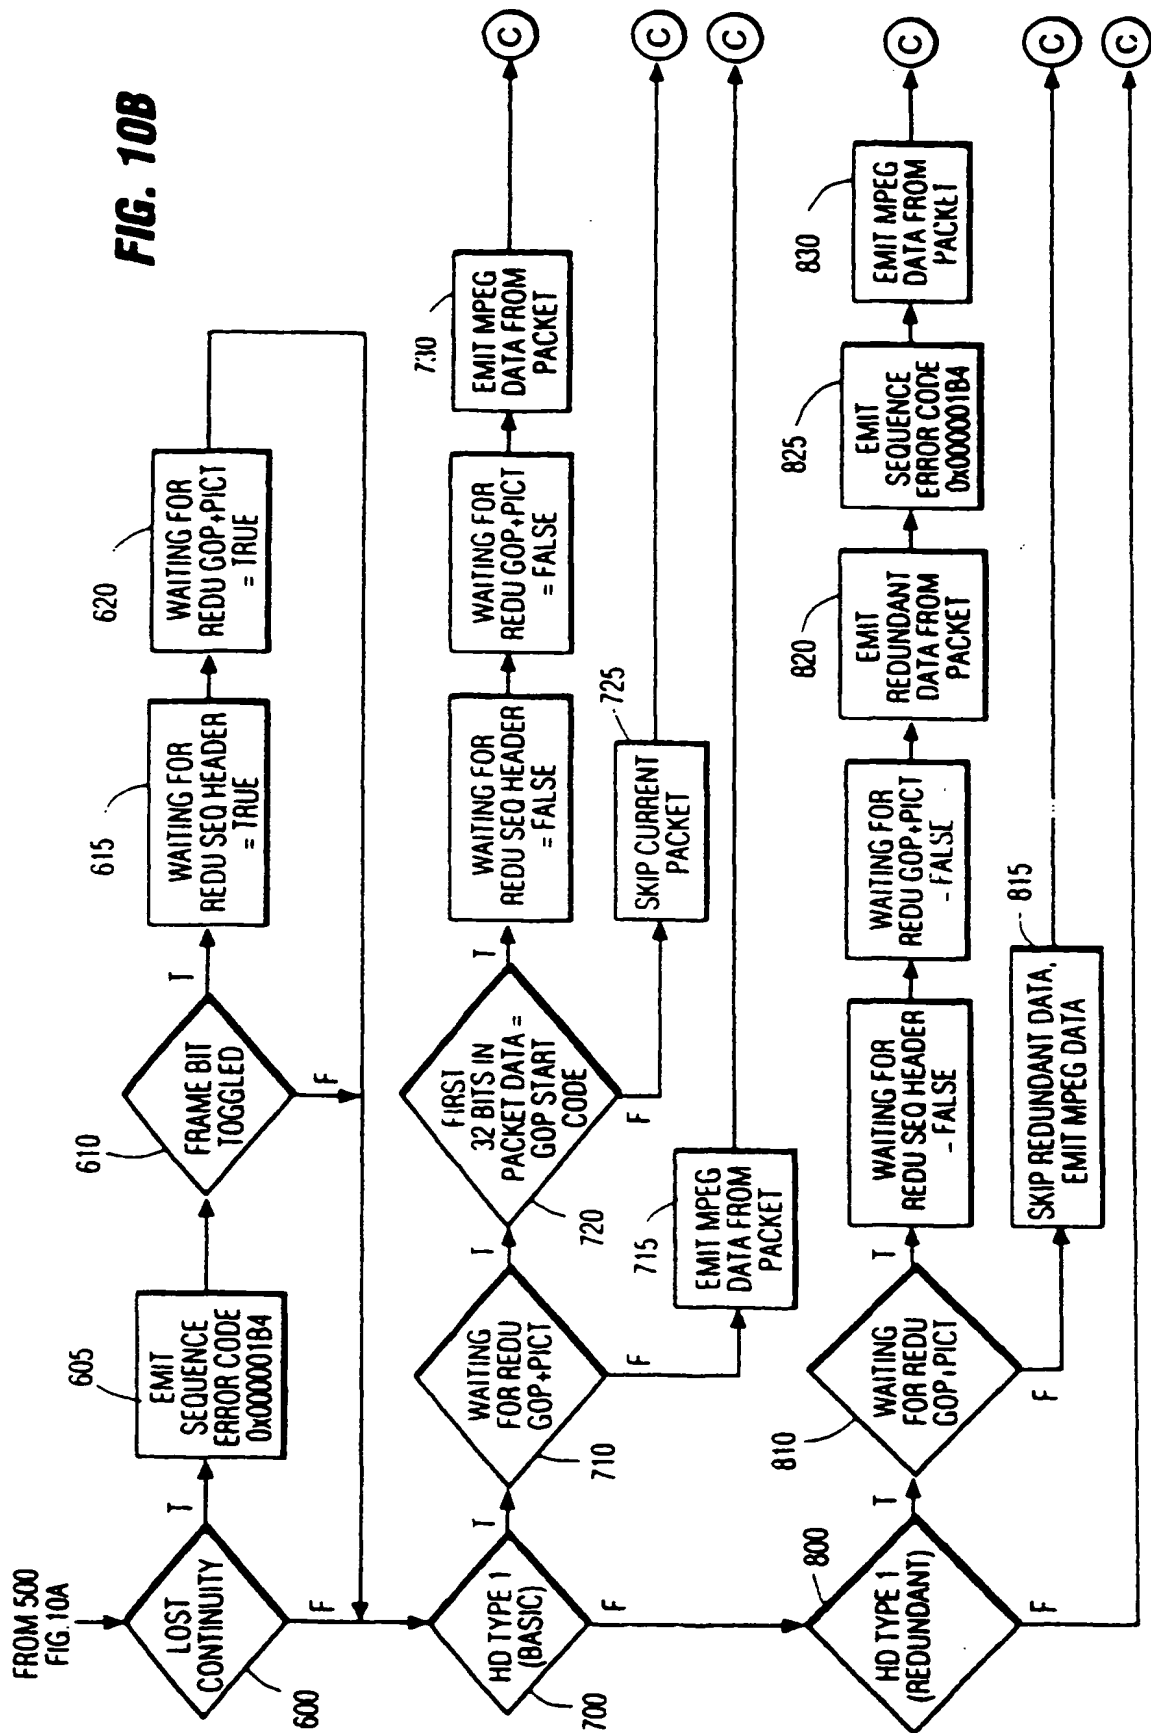

This Page Blank (uspto)